




# Smart Doser 2 & 4

## Manual



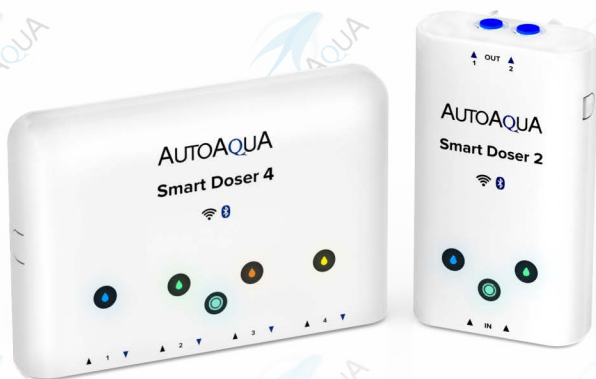







Model








ASD-200

ASD-400


## Smart Doser 2 List of Parts (Can be Purchased Separately)

Item	Picture	Description
Smart Doser 2 Controller		1. 2-Channel Dosing Pump 2. Wall-Mount Bracket
Universal Power Adapter		Input : 100-240 VAC 50-60 Hz Output : DC 12 V / 1 A
Hang-On Bracket		Max. Mounting Thickness : 3/4 inch (19 mm)
Quick-Connect Elbow x 2		L Type 1/4" Tube Connector
Tube Clip		1. Organizing tubes into/out of tank/sump 2. Compatible with 1/4" Tube
Calibration Cylinder		10 ml Calibration Cylinder
Screw x 2		Use with Wall-Mount Bracket
Tubing 9.8 feet (300 cm) x 2		1. 2 color : Blue & Green 2. 4 mm ID x 6.4 mm OD


## Smart Doser 4 List of Parts (Can be Purchased Separately)

Item	Picture	Description
Smart Doser 4 Controller		1. 4-Channel Dosing Pump 2. Wall-Mount Bracket
Universal Power Adapter		Input : 100-240 VAC 50-60 Hz Output : DC 12 V / 1 A
Quad Tube Holder		1. For rimmed or rimless aquariums up to 1/2 inch (12.7 mm) 2. Compatible with 1/4" Tube
Tube Clip x 2		1. Organizing tubes into/out of tank/sump 2. Compatible with 1/4" Tube
Calibration Cylinder		10 ml Calibration Cylinder
Screw x 2		Use with Wall-Mount Bracket
Tubing 9.8 feet (300 cm) x 4		1. 4 color : Blue & Green & Orange & Yellow 2. 4 mm ID x 6.4 mm OD


## Smart Doser 2 Installation

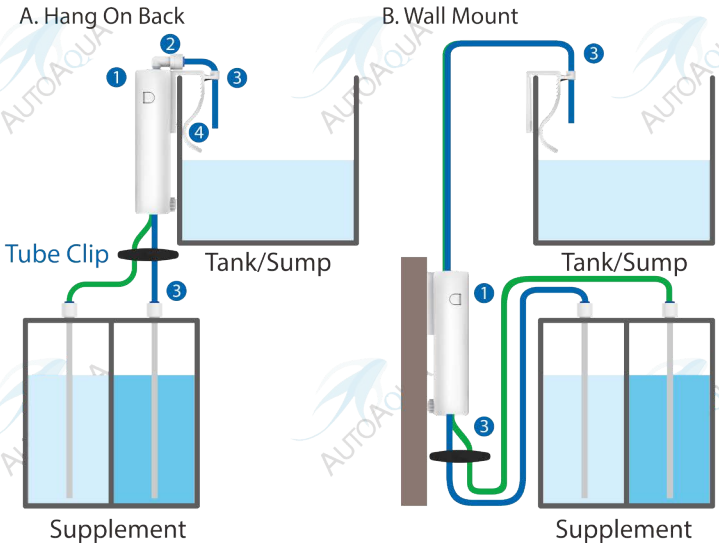


- 1 A. Hang On Back : Slide the Controller onto the HOB Holder.  
B. Wall Mount : Screw the Bracket on the wall and slide the Controller onto the Bracket.
- 2 Hang On Back : Install Quick Connect Elbows.
- 3 Insert Inlet and Outlet Tubes.
- 4 Hang On Back : Hang the Controller on the Tank.
- 5 Power On.

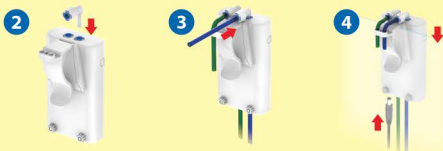

## Smart Doser 4 Installation

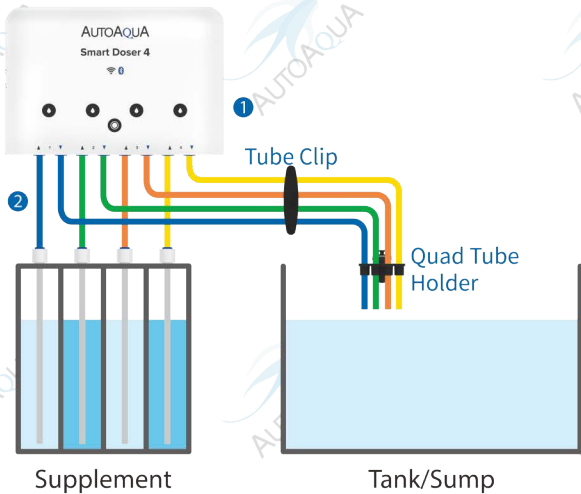

- 1 Screw the Bracket on the wall and slide the Controller onto the Bracket.
- 2 Insert Inlet and Outlet Tubes.
- 3 Power On.

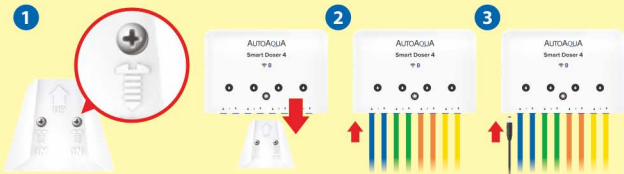

## Before Downloading the App

Must do a Manual Dose by long-touching pump button till supplement drips out from the outlet tube.  
Make sure the supplement flows through the tube completely and no air bubble in the line.



## aquaLine Function

- aquaLine Download  
Free download aquaLine on Apple Store or Google Play.






- Function  
For App connection and Doser Setting (Schedule, Manual, Group, Feed Mode, Calibration\*, and customized setting), Please visit AUTOAQUA website :  
Support Center > aquaLine > Video





\*Each Pump has been calibrated at the factory. We recommend recalibrating prior to ensure accuracy.

## LED Indicator

LED Indicator	Status	Description	Action
 Home indicator	Solid	ON Line Mode	N.A.
	Faded	OFF Line Mode	Add the device back to the App to shift to ON Line Mode.
	Faded with alarm	Power Overvoltage Detection	Check the power adapter output is 12V, rather than 24V.
 Water Drop Indicator	Flashing	Pump On	N.A.
	Solid	Pump Off	N.A.
	Flashing red	Empty Supplement	Refill the supplement
 Home Indicator & Water Drop Indicator	Flashing alternately	In Feed Mode	N.A.

## How to reset Smart Doser?

1. Long press  on the device at least 8 seconds until all the indicators flash with a beep sound. ( turns into faded.)
2. Delete the device on App.
3. Add the device back to the App.



## Notice

1. Please read the manual before installation.
2. Tubing must be inserted into pump inlets and outlets completely.
3. Do not use with corrosive liquids or liquids that will easily crystallize.
4. Must Prime each pump before connecting to App.
5. **Must place the device and water tubes in the VERTICAL position when first priming.**
6. Do not disassemble the product. Unless instructed by AUTOAQUA. Disassembly without prior written consent by AUTOAQUA will void your warranty.

## Limited Warranty

1. Limited warranty is provided by AUTOAQUA only if your AUTOAQUA Product ("Product") was purchased from an authorized distributor or an authorized reseller.
2. All warranty repairs or replacement are performed by the authorized distributor or authorized reseller in the region where the Product was first shipped by AUTOAQUA.
3. The limited warranty is valid for a period of 1 year under proper installation and normal use from the date of the original purchase listed on the proof of purchase or sales receipt.
4. In the event of a limited warranty claim, proof of purchase or sales receipt (issued to the original purchaser) is required.

Purchase Date

(Y/M/D)

Warranty Period

One year from the purchase date

Place of Purchase

(Store name, phone, email, address)

Service

AUTOAQUA Technologies Co., Ltd.  
7F-7., NO.229, Fuxing 2nd Rd., Zhubei  
City, Hsinchu County, Taiwan  
E-mail : [service@autoaqua.com.tw](mailto:service@autoaqua.com.tw)  
[www.autoaqua.com.tw](http://www.autoaqua.com.tw)

\* Please go to AUTOAQUA website to get the distributor information.



CCAF22Y10160T0



FR

Cet appareil,  
ses accessoires  
et cordons  
se recyclent

À DÉPOSER  
EN MAGASIN



À DÉPOSER  
EN DÉCHÈTERIE

